

C0522 - 500lb Cube Ice Machine

Prodigy Plus® Modular Cube Ice Machine

The world's smartest cuber.

As the world's only self-monitoring cuber, the new Scotsman Prodigy Plus® cube ice machines make it easier than ever to maintain your equipment and save money. Whether it's the advanced ice level control or an optional feature board for quick diagnostics, this is ice-making re-imagined. And with intuitive technology like AutoAlert™ indicator lights, a reduced operational footprint and easy-access service from the front panel, Prodigy Plus® cubers are simply the smartest, most reliable way to create fresh-tasting ice — every time.



- AutoAlert™ indicator lights for better visibility
- Operational footprint among the industry's smallest
- · Industry-exclusive QR code instantly connects users to service information and warranty history
- · One-touch cleaning reduces labor costs and saves time
- Front-located air filter for more efficient operation
- Self-aligning front panel for easy access to key components
- Patented WaterSense purge control automatically reduces scale buildup
- Patented Harvest Assist efficiently moves cube ice to the bin
- Smart-Board™ advanced feature module available for additional diagnostic capabilities
- Optional Vari-Smart™ ice level control allows operators to customize ice levels
- Antimicrobial protection guards internal surfaces between cleanings
- A full range of water- and energy-saving features



24 Hour Volume Production

A	ir Cooled	d	Water Cooled
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C Air 90°F/32°C 50°F/10°C Water 70°F/21°C
475/216 lb/kg		340/154 lb/kg	480/218 409/186 lb/kg lb/kg





Modular Bin Options

		Bin Application		
Model Number*	Dimensions W" x D" x H"	Capacity lb/kg	Finish	Ship Weight Ib/kg
B322S	22 x 34 x 44**	370/168	Metallic	140/64

* Contact Scotsman for bin top requirements. ** Add 6" Height for bin legs







- 3 years parts and labor on all components.
- 5 years parts and labor on the evaporator.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor




- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

B322S

C0522 - 500lb Cube Ice Machine

Prodigy Plus® Modular Cube Ice Machine

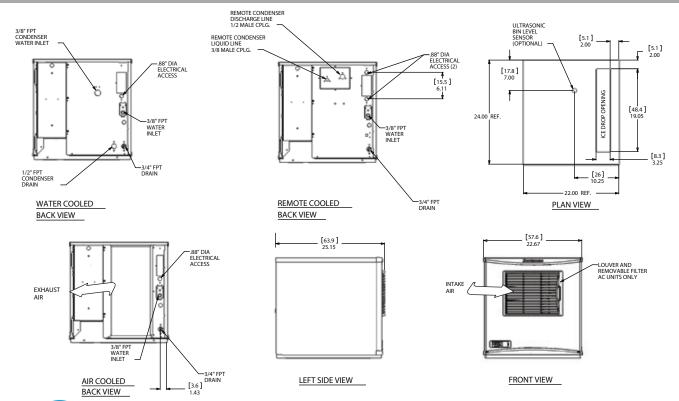



				Max. Fuse Size			Energy Consumption		Usage b (liters/45.4 kg)
	Model Number Cube Size: medium or small	Condenser Unit	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable	Condenser)/70°F(21°C)
	C0522MA-1	Air	115/60/1	15	2	13.5	5.94	18.0/68.2	-
med	C0522MW-1	Water	115/60/1	15	2	11.9	4.48	21/79.5	152.0/575.8
	C0522MA-32	Air	208-230/60/1	15	2	6.5	5.94	18.0/68.2	-
	C0522SA-1	Air	115/60/1	15	2	13.5	5.94	18.0/68.2	-
SITI	C0522SW-1	Water	115/60/1	15	2	11.9	4.48	21.0/79.5	152.0/575.8
₽	C0522SA-32	Air	208-230/60/1	15	2	6.5	5.94	18/68.2	-
	C0522SW-32	Water	208-230/60/1	15	2	5.6	4.48	21.0/79.5	152/575.8



All Models

Dimensions (W x D x H):

Jnit: 22" x 24" x 23"

(55.9 x 61.0 x 58.4 cm)

Shipping Carton: 26" x 28" x 29"

(66.0 x 71.1 x 73.7 cm)

Shipping Weight: BTUs per hour: 160 lb / 73 kg 7,900

Refrigerant: R-404A



Accessories

Model Number	Description
KVS	Vari-Smart™ Ice Level Control - Program ice bin levels to match ice needs.
KSBU	Smart-Board™ Advanced Control - Use additional operational data for fast diagnosis.
KSBU-N	Smart-Board™ Advanced Control with Network - Network capable.
KPAS	Prodigy Advanced Sustainability Kit - Includes KVS and KSBU - N
KPPSA223	Prodigy Plus® Side Air Flow Kit for C0322 and C0522

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

	Minimum	Maximum	
Air Temperatures	50°F (10°C)	100°F (38°C)	
Water Temperatures	40°F (4.4°C)	100°F (38°C)	
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)	
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
Electrical Voltage	-5%	+10%	

Specifications and design are subject to change without notice.

• 101 Corporate Woods Parkway, Vernon Hills, IL 60061 • SCOTSMA



Scotsman[•]

B322S, B330P, B530P/S, B842S, B948S - Storage Bins Modular Storage Bins

Features

- New sleek, contemporary styling. A perfect match to Prodigy Plus[®] cube ice machines and other Scotsman ice machines.
- Convenient, built-in scoop holder.
- Easily removable baffle, no tools required for cleaning.
- Lightweight.
- Unique recessed drain fitting for maximum installation flexibility.
- Corrosion resistant
- Spring loaded door with hidden hinges for easy opening and closing (except for B230P).
- Available in metallic finish or durable rotocast plastic.
- Ice scoop included.



B530S show with optional KLP8S legs.





Storage Capacity

B322S	B330P	B530P/S	B842S	B948S
Application	Application	Application	Application	Application
Capacity	Capacity	Capacity	Capacity	Capacity
370/168	344/156	536/244	778/353	893/406
lb/kg	lb/kg	lb/kg	lb/kg	lb/kg

Application capacity is based on 90% of total volume in cubic feet x 34 lb/ft $^{\rm 3}$



Polyurethane Insulation

Foam insulation is forced between the wall and liner under heat and pressure to form a perfect wall to wall bond, preserving ice supply for long periods.




The polyethylene bin interior is sanitary and easy to clean. Resists scratches and scuffs from ice scoops.




- 3 years parts and labor on all components.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor



- 101 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

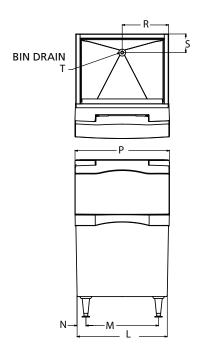

Installation Note: Allow 6" space at back for utility connections.



Dimensions

Model #	Α	В	С	D	Е	F	G	Н	J	K	L	M	N	Р	R	S	Т
B322S	28.23	34	45.5	61.24	18	3.88	25	32.75	44	6	22	15.5	3.25	22.5	11	6	.75 NPT
B330P	28.15	34	45.5	47.24	18	3.33	25	32.42	31	6	30	23.5	3.08	30.5	15	6	.75 NPT
B530P/S	28.15	34	45.5	61.24	18	3.09	25	31.93	44	6	30	23.5	2.83	30.5	15	6	.75 NPT
B842S	28.07	34	45.5	61.87	18	3.88	25	32.75	44	6	42	35.5	3.25	42.5	21	6	.75 NPT
B948S	28.05	34	45.5	61.24	18	3.88	25	32.75	44	6	48	41.5	3.25	48.5	24	6	.75 NPT



Overall Dimensions

Model #	Carton (W x D x H)*
B322S	22" x 34" x 44"
B330P	30" x 34" x 31"
B530P	30" x 34" x 44"
B530S	30" x 34" x 44"
B842S	42" x 34" x 44"
B948S	48" x 34" x 44"

^{*} Add 6" Height for bin legs.



Shipping Information

			_
ı	Model #	Carton (W x D x H)	Weight (lb/kg)
ı	B322S	26" x 36" x 49"	140/64
ı	B330P	33" x 36" x 35"	90/41
ı	B530P	33" x 37" x 49"	110/50
ı	B530S	33" x 37" x 49"	150/68
ı	B842S	45" x 36" x 49"	190/86
U	B948S	51" x 36" x 49"	209/95
76.			



Accessories*

Model Number	Description
KBC1	Kit, bit casters for B530S, B842S, B948S and SB380.** Not
KBC1P	for use with B322S or SB480 when using extensions. Kit, bin casters for B330P and B530P.**
KLP7	Kit, legs, 6", flanged feet, for B bins, HD dispensers, AFE CU1/2/3 and NSE.
KLP8S	Kit, legs, 6", stainless steel, for B bins, HD dispensers, AFE, CU1/2/3 and NSE.
BGS10	Bagger, hooks on any bin.
KBAG	Kit, bags, 1000, for BGS10.
KSEALER	Kit, tape sealer, for BGS10.
KTAPE	Kit, tape, 180 ft. roll, for BGS10.
KHOLDER	Kit, scoop holder, stainless steel.

**3.5" Diameter, 2 locking, raises bin 4.5".

