DINEX®
DINING EXCELLENCE

JOB _____ ITEM # _____

HOT TOP FOOD COUNTERS

DineXpress®

Item Numbers

- ❑ DXDHT2
- ❑ DXDHT3
- ❑ DXDHT4
- ❑ DXDHT5
- ❑ DXDHT6

Application
The DineXpress Hot Top unit is a must for the professional look of any line up and will help you present your food. The versatile modular design allows you to custom design either a cafeteria or a buffet line-up. All DineXpress units are compatible and will interlock with other DineXpress units.

Construction
General: The DineXpress Hot Food Units have a 16-gauge 300 series stainless steel top with 1-1/2" turn down on all sides. Front and end panels are constructed of 18-gauge stainless steel. The corner posts are constructed of 14-gauge stainless steel.

Heated Top: The Hot Top unit has a 14-gauge heating surface. The top is thermostatically controlled and has temperature adjustment knob. A signal light indicates top's temperature cycling. Additional non-conductive heat barrier is also provided to seal and isolate heat pan from top surface.

Casters: The DineXpress Hot Food Counters are provided with 5" diameter, heavy duty non-marking swivel casters, 2 are fitted with brakes.

Heating System: The Hot Top is heated by means of a 120 volt heating system. Each unit is provided with a 10' cord and plug.

Options
- Tray slides
- Food protectors guards
- Drop down work shelf
- Formica laminate panels
- Duplex outlet
- Intermediate undershelf
- Hinged doors
- Skirting
- Over head shelf
- Acrylic tops
- Engineered stone tops
- Legs in lieu of casters

Warranty
One year parts and labor.

DINEX®
Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

409-REV 01/10

KaTom Restaurant Supply, Inc.

HOT TOP FOOD COUNTERS

DineXpress

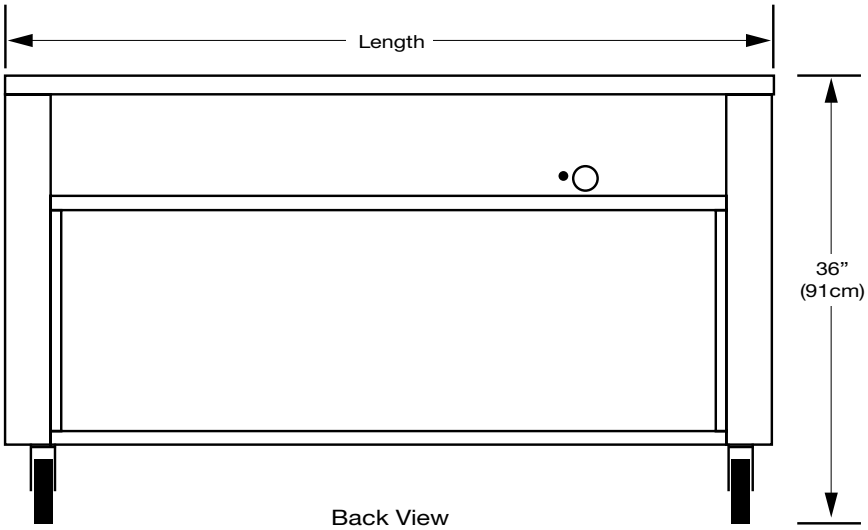

Back View

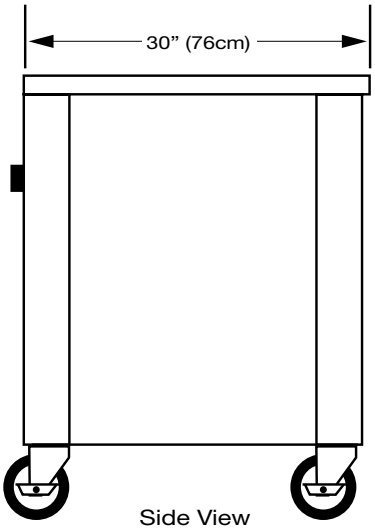

Side View

Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	WATTS 120v	AMPS 120v	NEMA NUMBER 120v
DXDHT2	DHT/2	35” (89cm)	30” (76cm)	36” (91cm)	145 watts	1.2	5-15P
DXDHT3	DHT/3	49” (125cm)	30” (76cm)	36” (91cm)	250 watts	2.1	5-15P
DXDHT4	DHT/4	63” (160cm)	30” (76cm)	36” (91cm)	350 watts	3.0	5-15P
DXDHT5	DHT/5	77” (196cm)	30” (76cm)	36” (91cm)	450 watts	3.8	5-15P
DXDHT6	DHT/6	91” (231cm)	30” (76cm)	36” (91cm)	550 watts	4.6	5-15P

Note: Electrical specifications are for the base model only and subject to change pending options specified.

DINEX | CARLISLE
INNOVATION FOR HEALTHCARE FOODSERVICE

Please confirm that you have the most current specification sheet by visiting www.dinex.com.
Dinex® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Printed in USA

DINEX®
Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

409-REV 01/10

KaTom Restaurant Supply, Inc.