

Project:

Item Number:

Quantity:

ULTRA INDUCTION FAJITA SKILLET HEATERS



Ultra Induction Faiita Skillet Heater

DESCRIPTION

The Vollrath Ultra fajita skillet heater offers simple, onetouch operation. It works with the two standard fajita pans and heats room-temperature pans to sizzle temperatures.

The fajita skillet heater comes complete with a 6 ft. (182.8 cm) power cord and plug. The case is made from 18-gauge 304 stainless steel with a vitro ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The fajita skillet heater is equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function

Agency Listings





This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

MODELS

69504F Induction Cast Iron Pan Heater (6-20P Plug) 6950402F Induction Cast Iron Pan Heater (Schuko Plug) 6950403F Induction Cast Iron Pan Heater (UK Plug)

FEATURES

- ☐ Multi-sensor solid-state controls with digital display
- ☐ Three push-button pre-programmed heating settings for easy of operation and cleaning
- ☐ Setting 1 heats a pan from room temperature to 450°F - 550°F (232°C - 287°C) in 80 seconds
- Setting 2 heats a pan from room temperature to 300°F - 350°F (148°C - 176°C) in 30 seconds
- ☐ Setting 3 heats a pan from room temperature to 400°F - 500°F (204°C - 260°C) in 60 seconds
- ☐ Firewall control protection
- ☐ Commercial high-flow fan for extra durability
- 90% efficiency rating
- ☐ Sloped control panel for runoff of liquid spills
- ☐ Rubber feet to prevent slipping of appliance
- ☐ Unit comes with cord and plug and does not require hard wiring
- ☐ Full two-year parts and labor warranty

IMPORTANT

- ☐ This appliance is intended for use with cast iron fajita pans.
- ☐ This appliance is intended for use with induction-ready cookware.
- ☐ All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- ☐ Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals	Date



ULTRA INDUCTION FAJITA SKILLET HEATERS


MODELS 69504F Induction Cast Iron Pan Heater (6-20P Plug)


6950402F Induction Cast Iron Pan Heater (Schuko Plug) 6950403F Induction Cast Iron Pan Heater (UK Plug)

DIMENSIONS

- ☐ Overall dimension: 15%" wide x 18½" deep x 5¾" high (40.3 cm x 47.0 cm x 14.81 cm)
- ☐ Shipping container dimension: 19" wide x 24" deep x 9" high (48.3 cm x 61 cm x 22.9 cm)
- ☐ Shipping Weight: 26 pounds (11.7 kg)
- ☐ Dimensions shown in inches (cm)



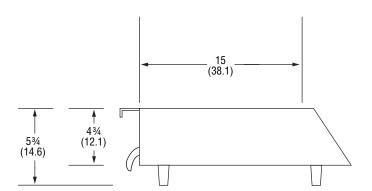

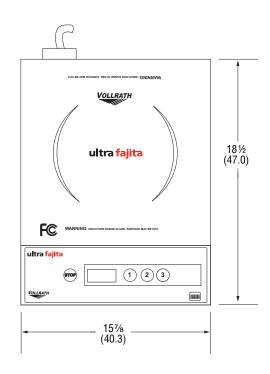

ELECTRICAL SPECIFICATIONS

Model	kW Rating	Volts	Nominal Amps	NEMA Plug
69504F	3.0 - 3.5 kW	208-240V AC	14.6	6-20P
6950402F	3.0 - 3.5 kW	208-240V AC	14.6	Schuko
6950403F	3.0 - 3.5 kW	208-240V AC	14.6	UK

Receptacles









The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Customer Service: 800.628.0830

Canada Customer Service: 800.695.8560 Main Fax: 800.752.5620 or 920.459.6573 Technical Services: 800.628.0832 Technical Services Fax: 920.459.5462