

COUNTER-TOP SHAKE or SLUSH FREEZER


**BEST
WARRANTY
IN THE
INDUSTRY**



Optional light kit available.

- Compact, space-saver unit, offers the convenience to serve frozen beverages, shakes, smoothies or frozen cocktails.
- One selector switch, auto-off-clean, for simplified operation and cleaning.
- High capacity refrigeration system designed for high temperatures produces volumes of shakes or frozen beverages.
- Low mix warning light with electronic controls are auto-fill ready.
- Stainless stator auger, heavy duty speed reducer, 3/4 hp drive motor sets the standard for long life dependability.
- Air filter located behind left side is easily cleaned to maintain continuous high performance.
- Optional lighted merchandising panel attracts customers to their favorite flavored frozen beverage.
- One piece clear polycarbonate door highlights pre-flavored products.
- Electric, CO², or air operated mix pump kits are available.



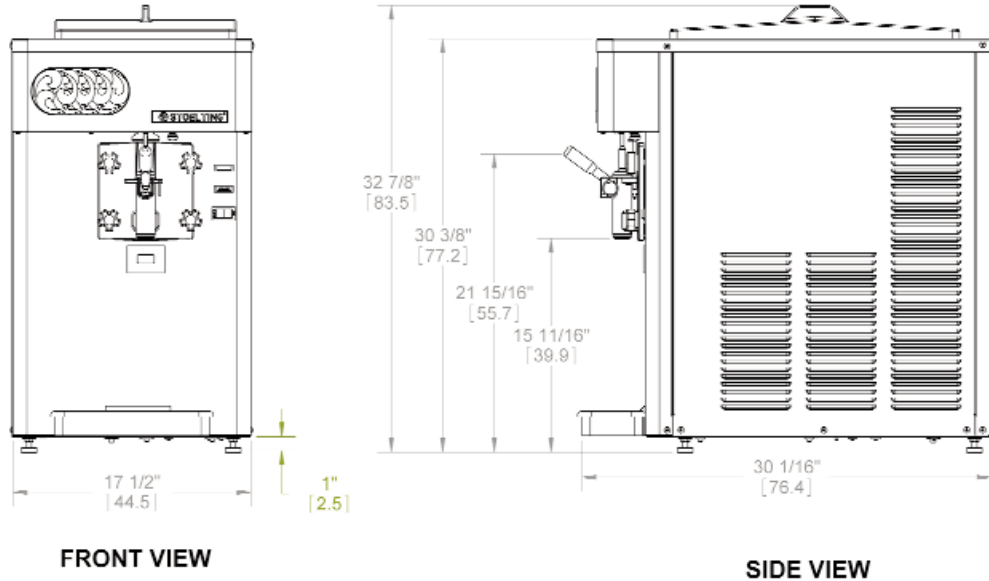

SPECIFICATIONS	MODEL F112	
DIMENSIONS	FREEZER	WITH CRATE
Depth	30 1/16" (76.4 cm)	36 1/2" (92.7 cm)
Width	17 1/2" (44.5 cm)	19 1/2" (49.5 cm)
Height	32 7/8" (83.5 cm)	35" (88.9 cm)
WEIGHT	FREEZER	WITH CRATE
	288 lbs. (114 kg)	328 lbs. (149 kg)
ELECTRICAL	230 volt/ 60 Hz /1 phase Approximately 10 total running amps. 20 amp maximum fuse, HACR circuit breaker or regular circuit breaker. NEMA 6-20P, 20 amp 230 volt power cord provided.	
	F112-302: 220 volt/50 Hz/1 phase. Approximately 12 total running amps. NEMA 6-15P power cord provided	
REFRIGERANT	R404A HFC environmentally friendly refrigerant	
COMPRESSOR	8,600 Btu/hr	
DRIVE MOTOR	3/4 hp	
COOLING	Air-Cooled	
AIR FLOW	6" minimum air clearance on each side	
HOPPER VOLUME	5.43 gallons, 21.72 quarts, 20.55 liters	
FREEZING CYLINDER VOLUME	2.13 gallons, 8.55 quarts, 8.09 liters	
ACCESSORIES	Lighted merchandising display; Electric, CO ₂ or Air operated auto fill.	
WARRANTY	Five-year warranty on compressor, evaporator assembly, drive motor speed reducer, and auger. One-year warranty on parts and labor.	

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice.

Distributed by:

STOELTING
 FOODSERVICE EQUIPMENT
 502 Highway 67 • Kiel, WI 53042-1600
 920-894-2293 • 800-558-5807
 Fax: 920-894-7029
 E-mail: foodservice@stoelting.com
www.stoeltingfoodservice.com

ISO 9001:2000 Registered

Certified, Listed and/or Recognized by:

