


ANGLE LEDGE ROLL-IN REFRIGERATOR RACKS 207 SERIES

FEATURES AND BENEFITS:

- Durable rack specifically designed to fit roll-in or pass through refrigerators, freezers, and warming cabinets; eliminates unnecessary product handling while maintaining proper temperature levels. Holds 18" x 26" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Extruded angle ledge pan supports, riveted in place, accommodate heavy loads. Bottom of pan rests on angle ledges. See reverse side for capacity and pan spacing.
- Inboard heavy duty 5" swivel casters, two with brakes. Wheel placement permits easy "in-and-out" of roll-ins.
- Two styles available; Custom (C) or Deluxe (D). Deluxe includes perimeter bumper and enclosed base.

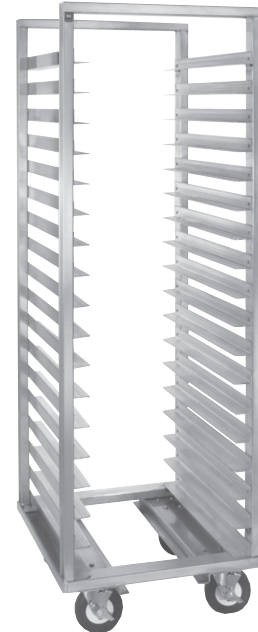

207-1818C




ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Various Caster Options

See page G-36 for accessory details.



207 Roll-In Series

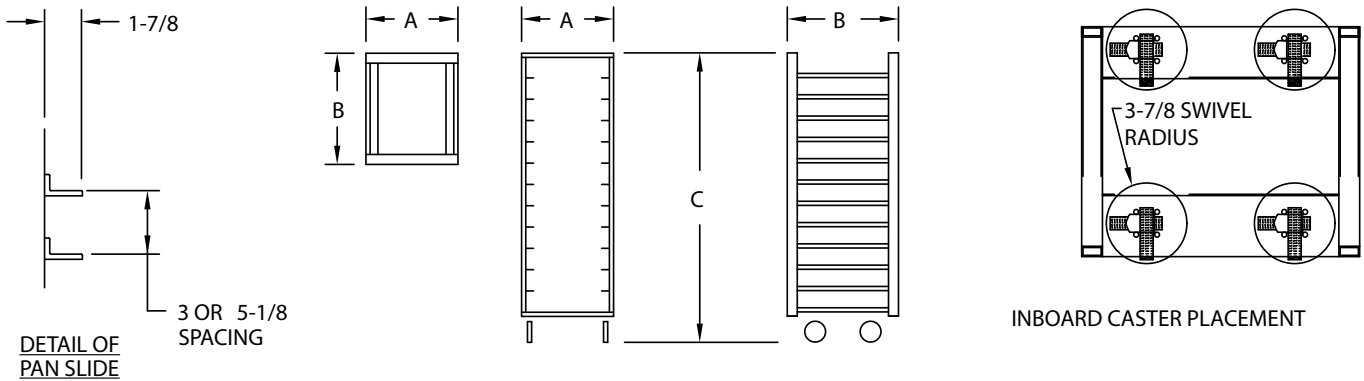

CUSTOM ("C")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1818-C	18	18 x 26	IN	21-1/4	25-1/8	64-1/2	18-5/8	24-3/8	55-15/16	LBS	65
		460 x 660	MM	540	640	1640	465	620	1425	KG	29
207-1811-C	11	18 x 26	IN	21-1/4	25-1/8	64-1/2	18-5/8	24-3/8	55-15/16	LBS	60
		460 x 660	MM	540	640	1640	465	620	1425	KG	27

DELUXE ("D")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1818-D	18	18 x 26	IN	23-1/8	27	64-1/2	18-5/8	24-3/8	55-15/16	LBS	70
		460 x 660	MM	590	690	1640	465	620	1425	KG	32
207-1811-D	11	18 x 26	IN	23-1/8	27	64-1/2	18-5/8	24-3/8	55-15/16	LBS	65
		460 x 660	MM	590	690	1640	465	620	1425	KG	29

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded aluminum channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded aluminum channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

DELUXE ("D") MODELS:

- Base plate: One piece .063 aluminum.
- Bumper: 1" wide gray rubber, perimeter type.

PAN SLIDES:

- Extruded angles, 1-7/16 x 1-7/8 x .102; riveted to posts.
- Pan spacing:
Model 207-1818: 3" centers.
Model 207-1811: 5-1/8" centers.



Gold indicates our Best Rack with the best warranty in the industry.
3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

SHORT FORM SPECIFICATIONS

Cres Cor Roll-In Refrigerator Rack Model 207-18____ - (C) or (D). Extruded aluminum welded construction with angles riveted. Capacity (____) 18" x 26" pans on (____) centers. Formed .190 bolsters. Inboard 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F.

- Custom Model (C)
- Deluxe Model (D) has .063 aluminum base plate; perimeter bumper.

3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories:
_____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.