

These solid door economy reach-in refrigerators and freezers are constructed of heavy-duty stainless steel making them strong and durable enough to survive any kitchen environment. Their narrower design is great for tight areas where space is limited. The cooling units are bottom-mounted and slide out for easy maintenance and cleaning. All models come with 6" casters and plastic coated wire shelving that is easily removable to adjust the shelf height. The front digital controller and LED readout make it easy to adjust the interior temperature. These models are ETL Listed and ETL Sanitation. They are backed with a 1-year warranty on parts and labor and a 5-year warranty on the compressor.

19-Cubic-Foot Economy Solid Door Reach-Ins

- 430 series stainless steel exterior
- Painted aluminum interior
- Self-closing doors
- Precise digital temperature controller with LED display
- Foamed-in-place polyurethane high density cell insulation throughout the entire cabinet
- Bottom mounted cooling unit that slides out
- Automatic defrosting
- Removable door gasket
- Recessed door handles
- (4) 6" casters (2 locking and 2 non-locking)
- 1 year warranty on parts and labor
- 5 year warranty on the compressor



Specifications


Refrigerator

Model	Doors	Shelves	Net Volume (Cubic Ft)	Overall Dimensions WxDxH (inches)			HP	Voltage	Amps	Gross Weight
VR19	1	3	19	29"	25"	82.5"	1/4	115V	5.2	326 lbs

Freezer

Model	Doors	Shelves	Net Volume (Cubic Ft)	Overall Dimensions WxDxH (inches)			HP	Voltage	Amps	Gross Weight
VF19	1	3	19	29"	25"	82.5"	1/2	115V	8.1	326 lbs

Plan Views

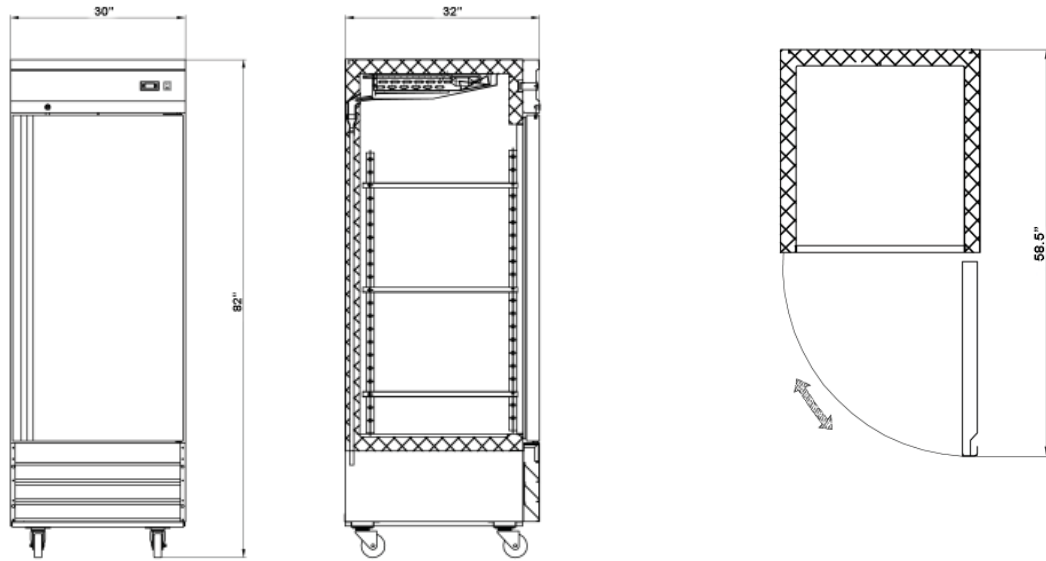

VR19
VF19

Features

Cooling System

- Refrigeration units use environmentally friendly R134A refrigerant to maintain a temperature range of 32°-41°F
- Freezer units use environmentally friendly R404A refrigerant to maintain a temperature range of -7°F - 0°F
- Bottom-mounted cooling unit slides out for easy cleaning and maintenance, and allows for storage area on top of the unit
- Rugged-built axial evaporator fans run efficiently with low-velocity and high-volume air flow

Electrical Control

- Electric LED temperature controller provides a digital display of cabinet temperatures and allows for easy temperature adjustments when necessary
- Temperature controller initiates automatic defrost schedule for worry-free use
- 7-foot power cord with NEMA 5-15 plug



Cabinet Construction

- Exterior is constructed of 430 stainless steel, including the doors
- Interior is constructed of a painted aluminum liner
- The cabinet is insulated throughout with a foamed-in-place, high-density cell polyurethane insulation

Door(s)

- Stainless steel exterior with aluminum liner on the inside
- Positive-seal self-closing doors with microswitch that shuts the evaporator fan off when a door is open
- Recessed handles are built into the door for easy opening and closing
- Locking door keep items inside secure after hours
- Stainless steel doors are field reversible

Shelving

- Adjustable plastic coated steel shelves that have a load capacity of 110 lbs per shelf

Model Features

- Incandescent interior lighting activated by door switch
- 6" casters come standard on all models. 2 locking wheels and 2 non-locking wheels.